

# INDUSTRIAL LIGHTING

## • EEW BPY SERIES EXPLOSION PROOF LAMP (TLED)



### Specifications


Rated Voltage	AC220V, 50/60 Hz
Explosion Protection	Ex d IIB T4 Gb/Ex tD A21 IP66 T130°C
IP Grade	IP66
Corrosion Resistance	WF1
Power Factor (PF)	>0.95
Cable Entry	G1/2"
Cable Outer Diameters	dia 6mm ~ dia 10mm
Battery Charging Time	≤24h
Emergency Starting Time	≤0.25s
Emergency Lighting Duration	≥90min

Note : T8 TLED is compatible with Philips MASTER 14W 2100 lumens or any similar equivalent.

### Dimensions

(unit: mm)

Lamp Qty	L1	L2	W
1x14 TLED	1316	1236	145
2x14 TLED	1316	1236	210

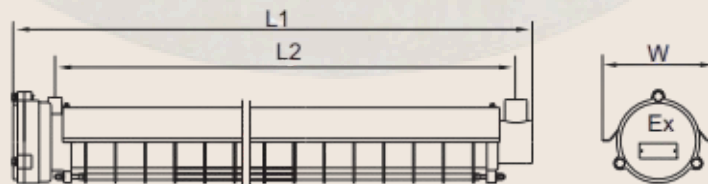

### Applications

Designed for Explosive Hazardous Locations Such as Oil Refinery, Storage, Chemical, Pharmaceuticals, Military Industries, Etc.

6282371642424

📍 Jl. Pramuka Sari I No.7 G2 RT.006/RW.009  
Rawasari, Cempaka Putih, Jakarta Pusat  
10570

☎ 6281297338222  
✉ admin@kartindo.co.id  
🌐 <https://kartindo.co.id>

